
8-pair snake cable 1186

Pin-connection of SurroundMonitor 10800, 10800X

Analog inputs

Pin:	Function:
24	audio input analog 1 (+, hot)
12	audio input analog 1 (-, cold)
25	screen/case
10	audio input analog 2 (+, hot)
23	audio input analog 2 (-, cold)
11	screen/case
21	audio input analog 3 (+, hot)
9	audio input analog 3 (-, cold)
22	screen/case
7	audio input analog 4 (+, hot)
20	audio input analog 4 (-, cold)
8	screen/case
18	audio input analog 5 (+, hot)
6	audio input analog 5 (-, cold)
19	screen/case
4	audio input analog 6 (+, hot)
17	audio input analog 6 (-, cold)
5	screen/case
15	audio input analog 7 (+, hot)
3	audio input analog 7 (-, cold)
16	screen/case
1	audio input analog 8 (+, hot)
14	audio input analog 8 (-, cold)
2	screen/case

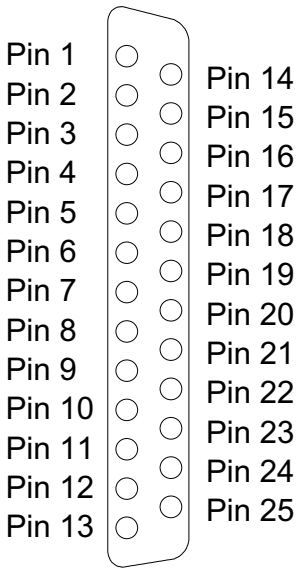

Digital inputs

Pin:	Function:
24	audio input digital 1 (+, hot)
12	audio input digital 1 (-, cold)
25	screen/case
10	audio input digital 2 (+, hot)
23	audio input digital 2 (-, cold)
11	screen/case
21	audio input digital 3 (+, hot)
9	audio input digital 3 (-, cold)
22	screen/case
7	audio input digital 4 (+, hot)
20	audio input digital 4 (-, cold)
8	screen/case
18	audio output digital 1 (+, hot)
6	audio output digital 1 (-, col)
19	screen/case
4	audio output digital 2 (+, hot)
17	audio output digital 2 (-, cold)
5	screen/case
15	audio output digital 3 (+, hot)
3	audio output digital 3 (-, cold)
16	screen/case
1	audio output digital 4 (+, hot)
14	audio output digital 4 (-, cold)
2	screen/case

Note: Digital I/O´s are in parallel, not active buffered.

The XLR-cables are normally numbered.